

PAB-SE2 Economical Barrier Gate


Dashou[®]
Parking System Expert




90 Degree Folding



180 Degree Folding



Single-fence Arm




Double-fence Arm

PAB-SE2 Economical series boom barrier adopts free-maintenance brushless DC motor and PWM variable frequency controller. Opening/closing time is 1.5~6s adjustable. Incredible 5 million MTBF makes the barrier always works well with long life span. Its boom direction is quickly exchangeable, boom type (straight/folding/fence) can be changed at site without replacing any parts. Telescopic straight arm is also available which help you reduce shipping cost.


Free-maintenance Brushless DC Motor with 5 million cycles MTBF

Free-maintenance brushless DC24V servo motor ensures 5 million cycles MTBF long life span; Max.100W super low consumption makes barrier environment friendly but outputs strong torque

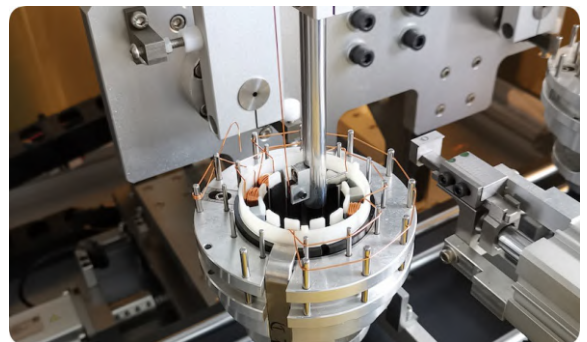

Boom Direction Is Exchangeable Without Replacing Any Parts

In the past you have to keep stock for barriers with different boom direction as different sites may require different boom direction. But now boom arm direction can be exchanged easily at site without replacing any parts

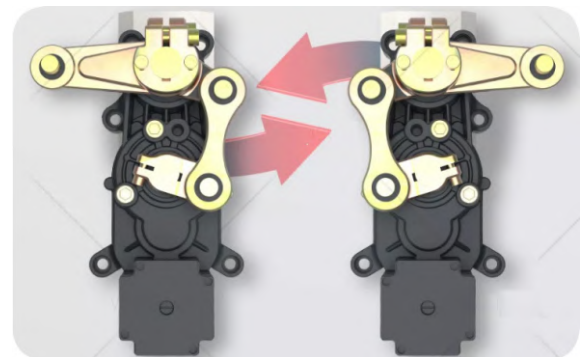

Leftward

Rightward

CE  ISO9001:2015

Xiamen Dashou Technology Ltd.

info@dashou-china.com
Tel: +86 592 5558660
Add.: The 2nd Floor, No. 882 2nd Tonglong Rd., Torch High-Tech Zone Industrial Park, Xiamen China

www.dashouparking.com
Fax: +86 592 5511002


Boom Auto-Reverse On Obstacle

While moving down, boom will automatically reverse immediately once it is obstructed by vehicle or pedestrian, which protects the vehicle or person. The sensitivity is adjustable.



Boom Swing-off Protects Boom and Vehicle

Boom will swing off 90 degree if it was hit by a vehicle, this is to protect both vehicle and boom. It is optional. You can easily add swing-off module to a barrier which is without swing-off.

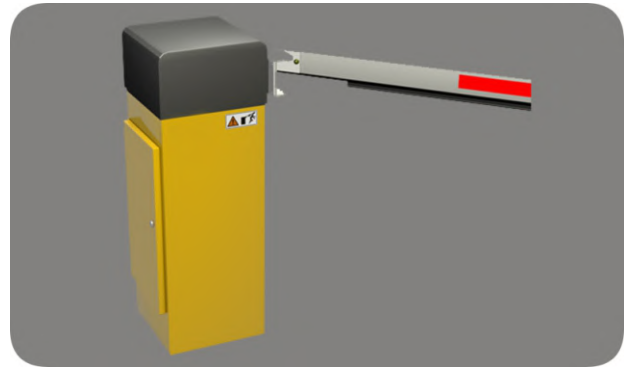

Manually Control In Case of Power Failure


If power supply is off, you can manually open/close the barrier gate by the black lever. Also boom can be manually locked in any position between horizontal and vertical by this level.

Warning: Not allowed to use the function when power on, may hurt your hand and damage the motor.



1.5~3s or 3~6s Speed Adjustable

The barrier gate adopts digital frequency servo controller, which allows the stepless speed control of the drive motor under the condition of no loss of output torque, and the opening/closing time can be respectively adjustable between 1.5~3s, or 3~6s.

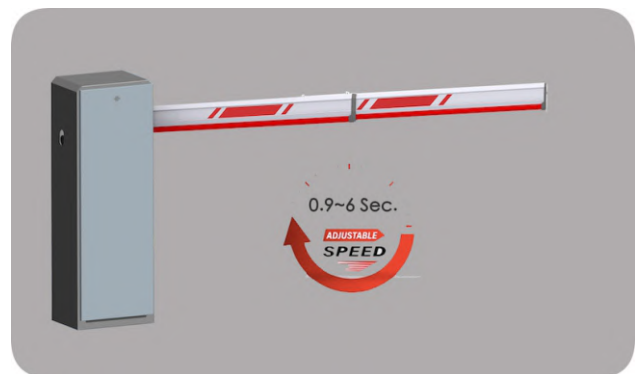

Backup Solar Panel or Lead-acid Cell

DC motor barrier can be powered by solar panel or lead-acid cell for back up power supply. Especially solar power is environment friendly which is good for earth.



LED Illumination Makes Boom Visible In The Night


LED Illumination bar can be installed onto boom to make boom visible in the night, so that drivers can view barrier and boom clearly, this improve safety of both barrier and vehicle. Also LED decorates barrier gate.




More Features

1. 1.5~3s, or 3~6 sec. speed adjustable
2. Smooth moving with Max. 6m boom
3. Different types of boom can be changed without replacing any parts
4. Boom automatically open up fully in case of power failure (Optional)
5. Safety of Vehicle--- Anti-hit by Loop Detector (Optional)
6. Safety of Vehicle— Anti-hit by IR photocell (Optional)
7. Safety of Vehicle--- Anti-hit by "Opening Priority"
8. Automatically close in given time (Programmable)
9. Automatically close or open by loop detector (Optional)
10. Enable or disable "Always-open mode" on remote (Optional)

Dimension (mm)

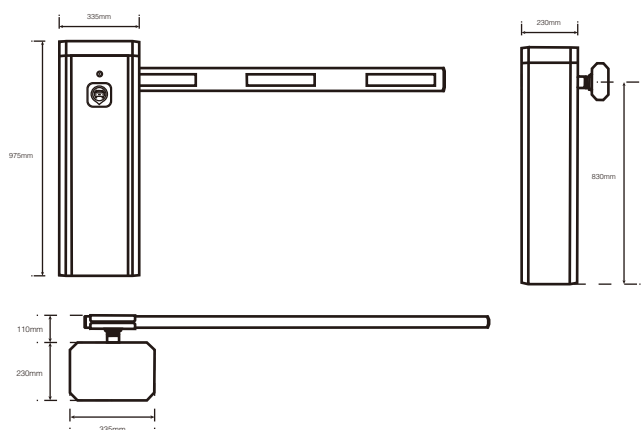

Application

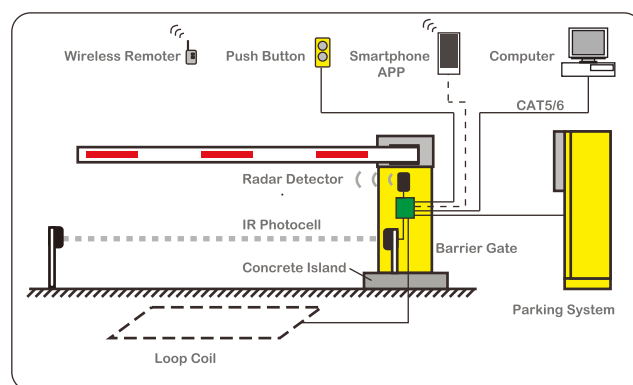


Technical Parameter

Close/open time	1.5~3s, or 3~6 sec. adjustable
Boom	Max. 6mtr. 100×45mm Aluminum alloy Octagonal boom
Boom	Telescopic straight arm optional
Boom Direction	Leftward / rightward exchangeable
Power Supply	AC220V or AC110V, 50/60Hz
Motor	100W DC24V brushless servo motor
Duty Cycle	Less than 100% duty cycle
MTBF	5 Million Cycles (Meantime Before Failure)
Controller	PWM variable frequency servo controller board
Wireless Remote	Two Remoters, distance>20m

Communication Interface	RS 485
Spring	1~2 pcs. spring according to boom length
Housing Material	1.5mm cold-rolled steel
Housing Painting	Powder coating last 10 years
Protection Rating	IP 54
G.W / N.W	48/46KG
Package Dimension	1040×380×380mm
Dimension	970×335×230mm (H*W*D)
Operating Temperature	-30°C~70°C
Operating Humidity	10% ~ 95%

Accessories



PWM variable frequency servo controller board



Remotes & Receiver
Distance>20m




100W Brushless DC24V Servo Motor



Auto-open Module




Boom Arm Bracket




Swing off Module




45×100mm Aluminum Alloy Octagonal Boom with Rubber Bar




Arm With LED light bar:
Green/red, DC12V power



90/180 Degree Articulated Arm



Single-fence Arm



Double-fence Arm




Ground Induction



Loop Detector



Photocell



Arm Holder